




100% water yield

## Advantages

- Allows up to 100% water yield
- Space saving technology inside the tank
- The filter housing can be easily removed without the need for tools
- Ideally suited when connecting the tank to a soakaway
- 250mm offset height between inlet and outlet
- Can manage roof areas up to 350sqm
- Standard 100mm connections
- Emergency overflow system available (optional extra)

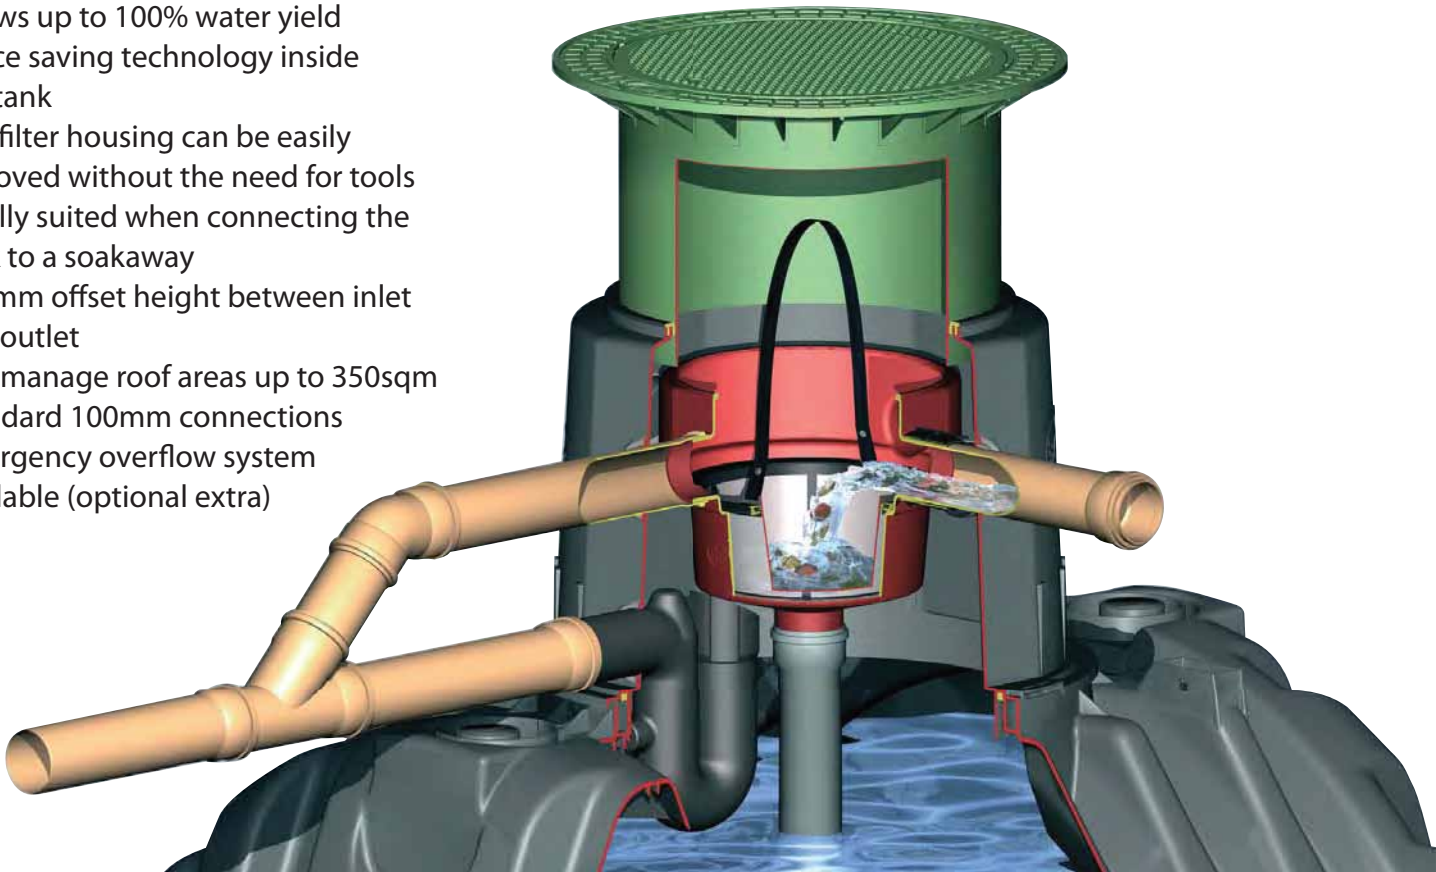

## Filter Cartridge

- Sieve set mesh 0.35mm (0.01")
- Convenient extraction using the integrated handle
- Easy to clean due to the smooth sieve structure



### Connecting dimensions for telescopic dome shaft

	Inlet	Tank overflow	Emergency overflow
Maxi [mm]	345-645	620-920	345-645
Maxi [inches]	13.6-25.4	24.4-36.2	13.6-25.4
Mini [mm]	345-545	620-820	345-545
Mini [inches]	13.6-21.5	24.4-32.3	13.6-21.5