


Optimax Pro, self-cleaning Filter



Efficient cleaning system with high water yield


Advantages

- Provides over 95% water yield
- Utilises patented, high-quality filter technology
- Low maintenance (self-cleaning)
- Space-saving filter technology inside the tank
- Transparent lid for filter visibility
- Can manage roof areas up to 350 sqm
- Standard 100mm connections
- Self cleaning Opticlean system available as an optional extra
- Low offset height of 165mm between inlet and outlet

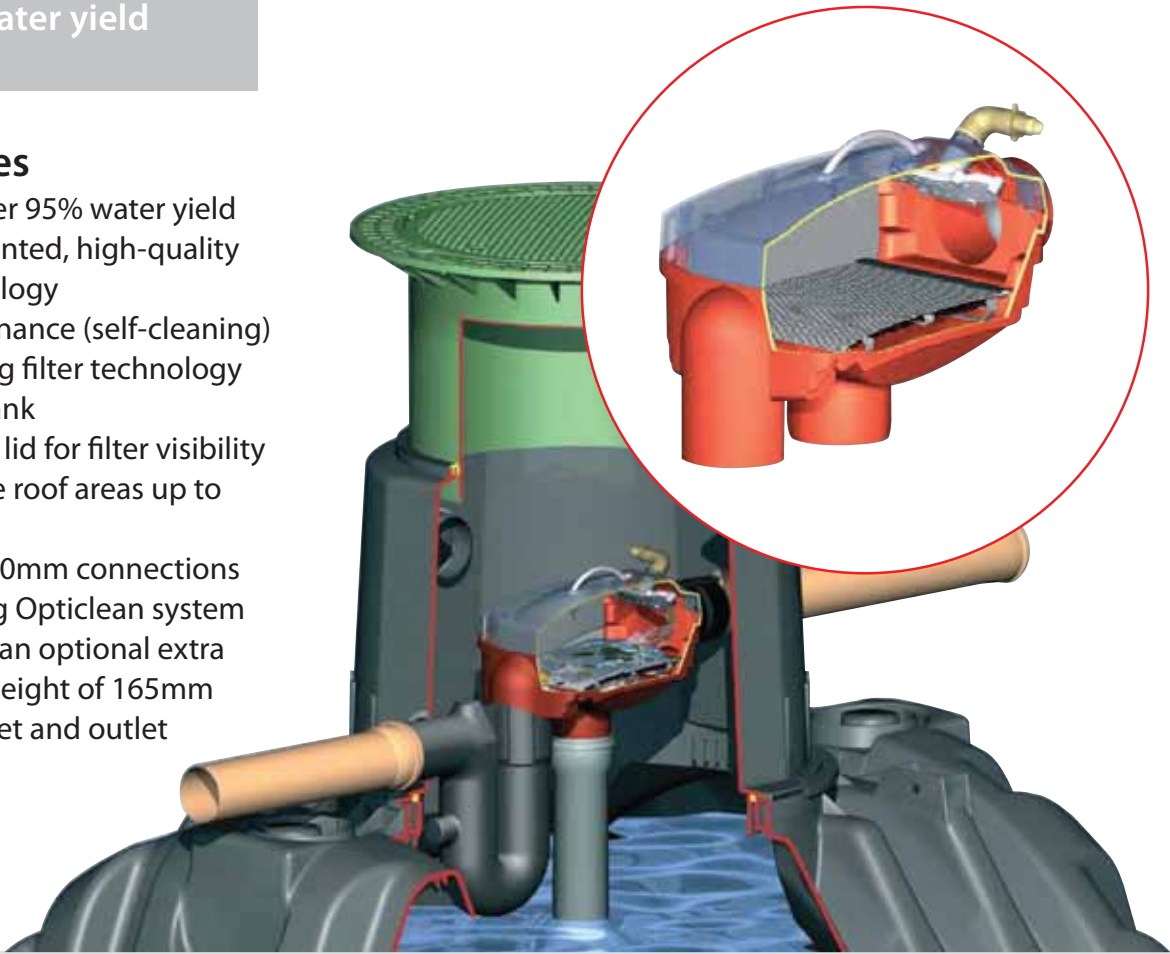

Cleaning unit Opticlean

- Very intense water wet for cleaning the filter sieve
- Routine maintenance intervals are kept to a minimum
- An automatic activation of the cleaning unit is carried out together with the automatic filter cleaning unit and the Aqua-Center-Silentio

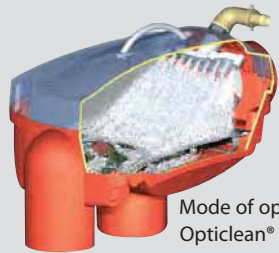

Mode of operation Opticlean®


Connecting dimensions for telescopic dome shaft

	Inlet	Outlet
Maxi [mm]	455-755	620-920
Maxi [inches]	17.9-29.7	24.4-36.2
Mini [mm]	455-655	620-820
Mini [inches]	17.9-25.8	24.4-32.3

Filter Cartridge

- Optimal output (>95%) is achieved thanks to a patented filter principle
- Very smooth surface and, therefore, max. self cleaning, mesh width 0.35mm (0.01")
- Optional with cleaning unit Opticlean

3-layer filter assembly

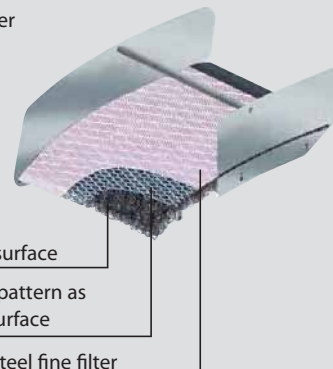

Collector surface

Diamond pattern as carrying surface

Stainless steel fine filter